


# Cable Proposal CP3781



14-April-2020 Version 0 Page 1 of 2

## 12-WAY DBMFC 4/2.5MM MULTIFU SM ORANGE 1200M DEUTSCHE GLASFASER

*Microduct, sheath and any stripe colour for illustration only, to be defined at product set up*

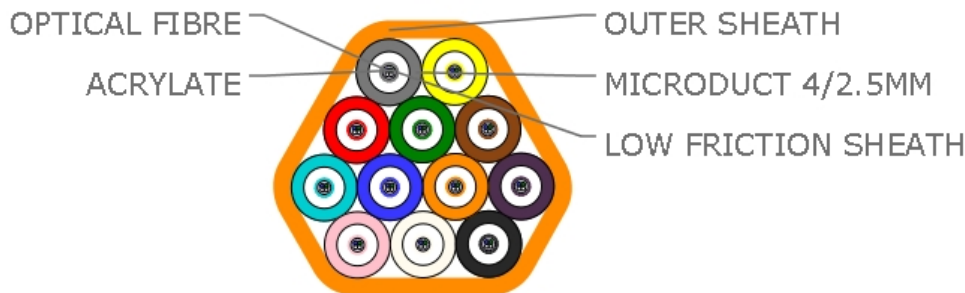

### PRODUCT OVERVIEW

#### Application

This product is a blown fibre tube assembly, pre populated with fibre unit for use in telecom networks.

#### Overall

Product Diameter	18.4mm
Product Weight	154g/m
Colour	Orange
Metal Free	Yes
Minimum Bend Radius <small>(Note 4)</small>	16D
Maximum Tensile Load	700N

#### Microducts

Primary Microduct(s)	12x 4/2.5mm, HDPE, low friction liner, smooth , with PIFU blue, orange, green, yellow, brown, violet, black, white, pink, aqua, red, grey
----------------------	---

#### Construction

Outer Sheath	HDPE, orange, 1.1mm thick
--------------	---------------------------

#### Additional Information

Crush Test:

Required Load (IEC 60794-5-20)	Inner Clearance Test
2000N/min	Pass

Maximum Load	Inner Clearance Test
3500N/min	Pass

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Emtelle can take no responsibility for actions taken based on the information contained in this document. Emtelle reserves the right to make changes to this document without notice. All sales of product are subject to Emtelle's terms and conditions of sale only, which can be found on Emtelle's website. This document is protected by copyright (c) Emtelle Group [2020]. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Emtelle UK Limited will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers.

[www.emtelle.com](http://www.emtelle.com)

## Cable Proposal CP3781

*Note 1: Diameters and thicknesses are measured to nearest 0.1mm.*

*Note 2: All dimensions and weight are 'nominal'.*

*Note 3: 'nominal' data is based on middle-spec, and is for information only, not for inspection purposes.*

*Note 4: 'D' is the appropriate product diameter for the bending direction.*