

UK DS 71735



71735 – Emtelle Toby Box



Product Description

The Emtelle Toby Box is an underground storage box for housing Microducts and Splice enclosures. The Toby Box has a hinged lid, so that access can be made at any point in time. The Toby Box is located at the boundary to the customer during FTTX installations and is used as a demarcation point for FTTX 'Homes Passed' where the customer does not require an immediate FTTX connection or can be used as a future 'Maintenance point' similar to an access chamber. The Toby Box can be used to accommodate the end of a microduct (sealed) ready for future extension to the home, where a fibre is then blown along the total microduct length between the cabinet / splice enclosure and the home. The Toby Box can also be used for housing an IP65 or IP68 splice enclosure where the drop cable to the home can be spliced.

Application

The Toby box should be installed as close to the customer boundary / Pin Kerb as possible so that no further digging is required to access the customers property. The Toby box should be installed with adequate backfill materials and should comply with local installation rules and guidance. The Lid should open towards the customers home. Where possible, the Toby Box should be situated in a position where it can feed two homes from a central location (so 2 microducts can be installed into one Toby Box. Each microduct should be sealed with an End Cap. There is a metal washer installed into the lid of the Toby Box, so it can be traced, should the pavement be resurfaced with the Toby Box beneath

Features

- Used as a demarcation point to convert 'Homes Passed' to 'Homes Connected'
- Accommodates Microduct & Duct sizes from 5mm to 54mm OD
- Narrow Design for Narrow Trenching
- Drainage holes in the base to prevent build-up of water / pooling
- Capable of housing 2 x Emtelle EMU (termination boxes).
- Enables angled drilling due to the long length of the lid and 'Radius'
- Toby box can be split in half to fit over existing cables
- Ribbed vertically and horizontally for strength and to set the box into concrete
- The lid opens 180° to allow full access to the inside of the Toby Box
- The lid can be locked with one security screw (to be ordered separately)
- The product is 100% recyclable

UK DS 71735

Advantages

- Small and easy to install
- Space for fibre splicing and tube management
- Low cost compared to small manholes
- Lower installation cost
- Easy access after installation and in the future
- A maintenance point close to the customers premises
- UV protected for European conditions
- A visible point in the network
- Advertising (on lid) of the operator to get a fibre connection

Material & Technical Data


| | |
|--------------------------|---|
| Overall Dimensions (mm): | 214 x 100 x 301 (LxWxD) |
| Material: | Polypropylene |
| Loading Specification: | BS5834 Pt2 |
| Colour: | Black |
| Badge: | Plain or Customer Specified |
| Weight: | 557g |
| Subscriber Count: | 2 Microducts maximum |
| Internal Connection: | Emtelle EMU Bix (x2, microduct connector (x2) |
| Traceability: | Metal disc included for traceability |
| Duct Diameters: | 5mm – 54mm |
| Operating Temperatures: | -45° to 90° C |
| Supply Quantity: | 360 units per pallet |

Accessories

EMU Box – Emtelle Multi-Utility Box

- Ports can accommodate microducts from 3mm – 16mm
- Available in Black or Grey (UV protected for Europe)
- Customer name can be added to lid
- Easy to assemble
- Integrated Rubber sealing in the lid
- Designed to fit into the Emtelle Toby Box
- An IP68 splice box that can accommodate up to 6 fibre splices using 45mm miniature splice protectors

| | |
|--------------------|-------------------------------------|
| Dimensions: | H x 31mm, W x 96mm, L x 193mm |
| Weight: | 140g |
| IP Rating: | IP68 |
| Impact Resistance: | EN62262 – IK07/08 |
| Retention Force: | Double Port: 20N - Single Port: 40N |
| Material: | Polypropylene + 30% glass fibre |
| Operating Temp: | -40° to +60° C |

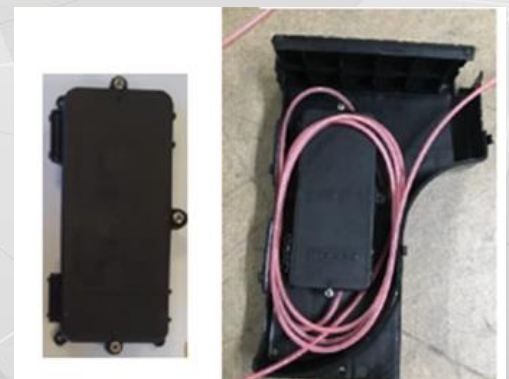

UK DS 71735

Customer Lead-in

- A Modular Customer Lead-in system that can accommodate building entry from the Emtelle Toby Box into a home or business
- Grey or Black in Colour
- The base is designed to restrict access into the Toby Box
- Base can be customer branded
- Allows multiple high access into the home
- Low Profile and attractive in design



On top of Toby Box



Medium Installation Height



Medium Installation Height



8/10mm drop tube

8/10mm drop tube
High entry

Packaging and Labelling

All products suitably packaged in recyclable materials and clearly labelled with Emtelle Product Code and Description where possible.

This document is intended as a guide only. Whilst the information it contains is believed to be correct, Emtelle can take no responsibility for actions taken based on the information contained in this document. Emtelle reserves the right to make changes to this document without notice. All sales of product are subject to Emtelle's terms and conditions of sale only, which can be found on Emtelle's website.

This document is protected by copyright (c) Emtelle Group [2019]. The products depicted are protected by intellectual property rights. Any unauthorized copying of this document or of our products is prohibited and Emtelle UK Limited will take action to prevent any infringement of its rights and to claim damages for the loss that it suffers.

www.emtelle.com